

SunGiga G2 Plus

520kWh

Liquid Cooling ESS Solution

The Jinko ESS 520 Liquid-Cooled Integrated Cabinet is a high-density, modular 1000V energy storage system. It consolidates battery modules, BMS, PCS, and fire protection into one cabinet, providing 522 kWh of capacity and 125 kW of power. Engineered for scalable and diverse applications, it offers exceptional safety, reliability, intelligent cooling, and smart software management.



High Integration, Flexible Deployment

All-in-one design integrating PCS (Power Conversion System) simplifies transportation, installation, and operation & maintenance. Modular architecture supports parallel connection of multiple units for scalable capacity expansion.



Enhanced Safety and Reliability

Comprehensive intelligent monitoring ensures real-time protection of the battery system. Built-in heating function maintains optimal operating temperatures, improving performance and reliability in varying climates.




Advanced Liquid Cooling Technology

Non-uniform liquid cooling pipeline design minimizes temperature differences between cells ($\Delta T \leq 2^\circ\text{C}$). Multiple cooling control modes adapt to operational needs, reducing auxiliary power consumption.



Intelligent Cloud-based Operation

Remote firmware updates ensure continuous system optimization. Cloud monitoring platform enables multi-device access for real-time oversight, analytics, and control.

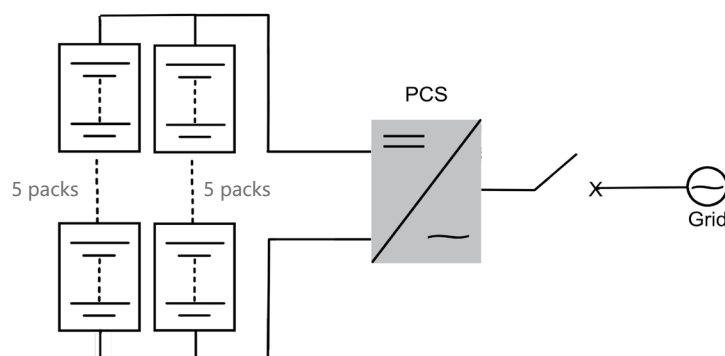

DC Side

Cell Type	LFP 3.2V/314Ah
Nominal Capacity	522 kWh
Rated Voltage	832 Vdc
Nominal Voltage Range	728V~936V
Pack Quantity	10 pcs
Max. Charge/Discharge Power	0.25 P
System Configuration	2P260S

AC Side

Rated AC Power	125 kW
Rated Voltage	400 Vac
AC Connection	3P4W
Rated Frequency	50 Hz
THDi	<3%

General Parameters

Life cycle	8000 @70%EOL
Operating Temperature	-30°C~55°C, derating > 45°C
Operating Humidity	≤95%RH, without condensation
Operating Altitude	≤3000m
Ingress Protection	IP55 (Cabinet); IP66 (PCS)
Corrosion Protection Class	C3 (C5 Optional)
Fire suppression system	System aerosol gas extinguisher + smoke detection + temperature sensing + flammable gas detection + explosion-proof intake & exhaust ventilation + explosion vent
Cooling Method	Liquid cooling (Battery); Air forced (PCS)
Max. Parallel Quantity	6 Units in parallel
Communication Protocol	RS485/CAN/Ethernet
Dimensions (W×D×H)	1920x1430x2400 mm
Weight	5,000 kg
Compliance Standards	IEC 62619, IEC 62477, IEC 60730, IEC 63056, IEC 61000, IEC 62040, IEC 62933, UN 38.3, UL 9540A, AS/NZS 4777.2